

WALL MOUNT SPEAKER



HIP-620
HIP-630
HIP-640



USER MANUAL

- For Black and white



Contents

Introduction	1
Profile of Product	1
Product features	1
Material characteristics	1
Product Information	2
Installation	3
U-shape Bracket Installation	3
Multi-angle Adjustable Bracket Installation	4
Rear Panel Introduction	5
Technical Parameters	7
Packing List	9

Introduction

Thanks for using our speaker products. All our products are tested strictly before leaving the factory, with guaranteed quality.

Our speakers are widely used in such places as schools, gymnasiums, square halls, parks, parking lots, railway stations, airports, villa communities and mall supermarkets, etc., and they will be your ideal choice for public address system.

For better installation, commissioning and use of the product, please read this manual in detail before installation.

Profile of Product

Product features

- Fashion minimalist design aesthetic atmosphere, white black for choice ;
- The intergration of professional wall design , fine appearance, sophisticated high-grade filing.
- Focus on sound quality, inverse-phase type design, and equipped with high pitch and low pitch double unit, clear sound level, mellow, transparent, clear and bright, strong bass;
- Rear power adjustable knob, free choice of input mode.

Material characteristics

Mesh: made of 1060 pure aluminium, subject to hardening and anti-oxidation treatment, not easy to cause deformation, and never get rusty.


Box body: made of UL94V-0 grade fireproof thickened ABS material, durable in use, safe and reliable.

Driver unit: treble diaphragm is made of natural silk film; and bass diaphragm is made of polypropylene material, 3-3.5 inches magnetic circuit design.

Mounting bracket: precision rust-proof treatment.

project	Specifications	HIP-620	HIP-630	HIP-640	
Acoustic system	Speaker unit	4" × 1", 1" × 1"	5" × 1", 1" × 1"	6.5" × 1", 1" × 1"	
	Sensitivity (1m, 1W)	90±2dB	90±2dB	91±2dB	
	Max. SPL(1m)	103±2dB	105±2dB	107±2dB	
	Frequency response	95Hz-20KHz	80Hz-20KHz	65Hz-20KHz	
	Rated power	20W	30W	40W	
Other specifications	Input	Constant voltage	70V/100V	70V/100V	70V/100V
		Constant resistance	8Ω	8Ω	8Ω
	Dimension (H×W × D)	255×176×170mm	280×194×185mm	310×215×203mm	
	Net weight	2.6kg	3.2kg	4.6kg	


Product Information

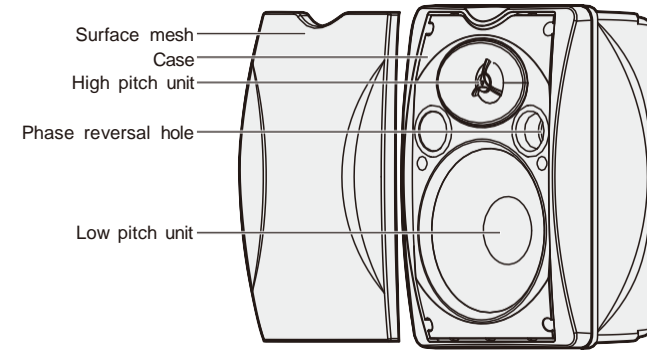

Wall mounted speaker (main box)

Packing List


Component	Quantity
Wall mount speaker (pair)	1
U-shape bracket	1
Product specification	1
Certificate of quality	1
Warranty card	1

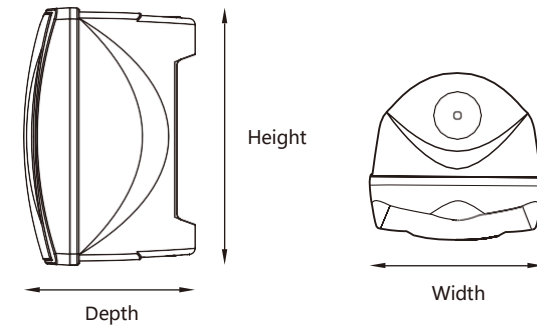


Model	Height	Width	Depth
HIP-620	255	176	170
HIP-630	280	194	185
HIP-640	310	215	203

(unit: mm)

Product dimension



U-shape bracket




Multi-angle adjustable bracket
(only support purchasing for HIP-630)


Installation

Suggestions for the installation position of the speakers: distance to the ground of the speaker is recommended at 1.8-2 m, the best play interval between the speakers is within 5 meters.


U-shape bracket installation

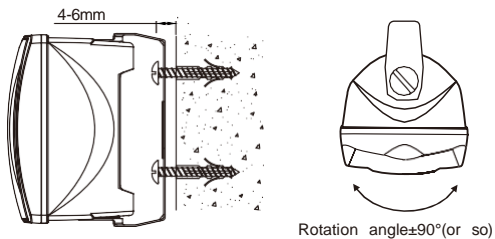


Vertical installation




Space between bracket installation holes




HIP-620
Vertical directivity pattern




HIP-620
Horizontal directivity pattern




HIP-630
Vertical directivity pattern



HIP-630
Horizontal directivity pattern




HIP-640
Vertical directivity pattern




HIP-640
Horizontal directivity pattern

Technical Parameters


HIP-620
Frequency response characteristics
(dB SPL, 1W, 1m)

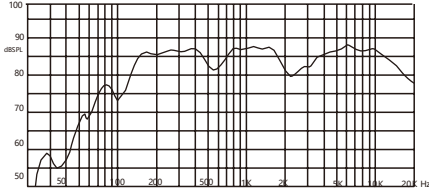


HIP-620
Distortion characteristic
(THD < 5% 1W, 1m, 100Hz-10kHz)

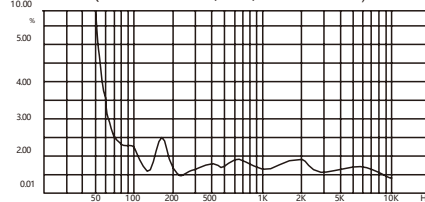


HIP-630
Frequency response characteristics
(dB SPL, 1W, 1m)

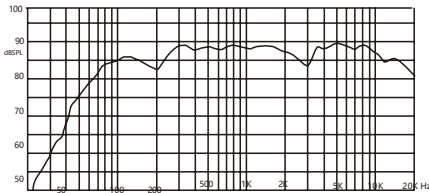



HIP-630
Distortion characteristic
(THD < 5% 1W, 1m, 100Hz-10kHz)

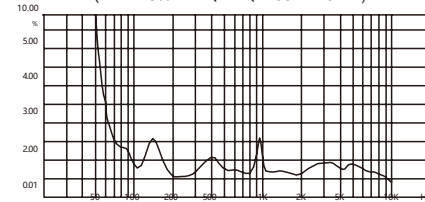

HIP-640
Frequency response characteristics
(dB SPL, 1W, 1m)

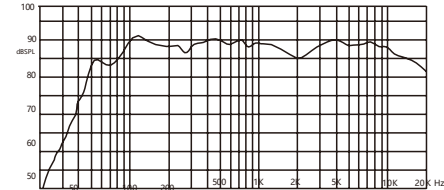


HIP-640
Distortion characteristic
(THD < 5% 1W, 1m, 100Hz-10kHz)

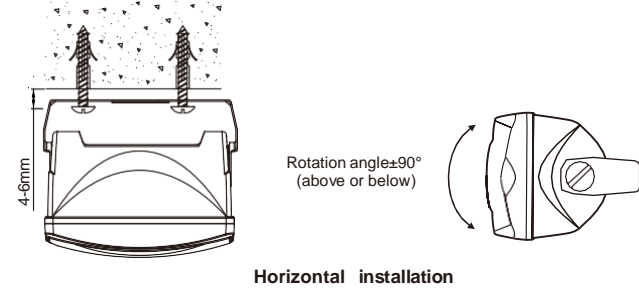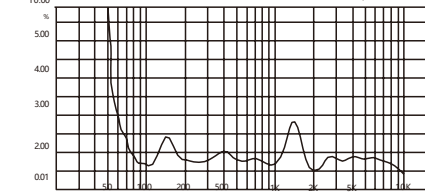



This bracket supports vertical and horizontal two installation methods, please choose the best way that meets your needs to install.

- ① In accordance with the bracket installation holes space diagram, select the appropriate location to install two 4mm diameter nail on the wall that needs to install the speaker, clearance between the nail cap and the wall is 4-6mm.
- ② Connect the speaker with the audio cable.
- ③ Hang on the speaker, adjust the angle of the speaker, and tighten the knobs on both ends of the bracket and check whether the installation is solid and reliable.

Multi-angle adjustable bracket (only support HIP-630 purchasing)

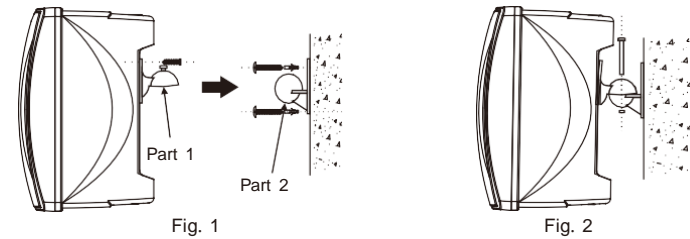


- ① Unscrew the multi angle adjustable type bracket knob screw firstly, separate part 1 and part 2. Fix the speaker and the part 1; select the appropriate position on the wall to fix the part 2. (Fig. 1)
- ② Connect the speaker with the audio cable.
- ③ Cover part 1 of the speaker on the sphere of part 2; adjust the speaker angle, fix the part 1 and part 2 with a knob screw firmly. (Fig. 2)

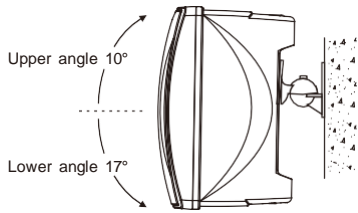

Rear Panel Introduction

HIP-620 Power adjustment knob

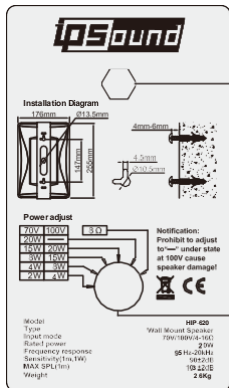


Audio line interface

Power adjustable knob

Power Terminal	Voltage	Constant voltage		Constant resistance
		70V	100V	8Ω
Black---white		20W	—	20W
		15W	20W	
		8W	15W	
		4W	8W	
		2W	4W	

- ▲ **Notification:**
When the audio line is the constant voltage, prohibit the knob to the 8Ω.
Prohibit to adjust to “—” under state at 100V cause speaker damage!

HIP-630 Power adjustment knob

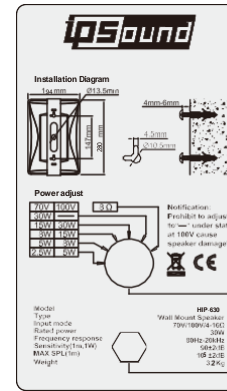


Power adjustable knob

Audio line interface

Power Terminal	Voltage	Constant voltage		Constant resistance
		70V	100V	8Ω
Black---white		30W	—	30W
		15W	30W	
		8W	15W	
		5W	8W	
		2.5W	5W	

- ▲ **Notification:**
When the audio line is the constant voltage, prohibit the knob to the 8Ω.
Prohibit to adjust to “—” under state at 100V cause speaker damage!

HIP-640 Power adjustment knob

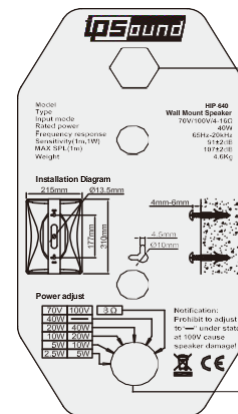

Audio line interface

Power adjustable knob

Power Terminal	Voltage	Constant voltage		Constant resistance
		70V	100V	8Ω
Black---white		40W	—	40W
		20W	40W	
		10W	20W	
		5W	10W	
		2.5W	5W	

- ▲ **Notification:**
When the audio line is the constant voltage, prohibit the knob to the 8Ω.
Prohibit to adjust to “—” under state at 100V cause speaker damage!